



interface

ATOMIC



VOICE  
OVER



**Voiceover 08**  
Voiceover artists interface



- Adjustable gain microphone preamp with 48v phantom power
- Sophisticated input gain system (AGA) for the perfect level
- Headphone monitoring mixer, with mic plus an external source
- Output signal available as analogue or digital audio

Voiceover 08

*The Voiceover 08 provides a high quality microphone pre-amp interface to any recording device or PC, together with headphone monitoring for the user. There is a highly sophisticated Automatic Gain Adjust (AGA) system to allow the non technical user to achieve perfect input gain levels using dynamic, condenser or ribbon microphones. The mic audio is output on the rear of the unit as balanced analogue audio on XLR, unbalanced on phono, and digital on S/PDIF, and TOSLINK.*

*The headphone monitoring mixer allows monitoring of the microphone input as well as an external audio input, which could be the cue audio or music for example. This monitoring audio is not presented on the output – only on the headphone monitor*

*The Voiceover 08 is therefore a high quality yet simple microphone pre-amp and monitor for use by non technical users or simply users that do not have time to worry about setting levels. Expected users include traffic/news reporters, voiceover artists, presenters for voice tracking applications, and any non broadcast operation that needs to be able to simply connect to a broadcast chain for recording or live use.*

# ATOMI C Voiceover 08

- **Microphone Pre-Amp**  
The primary function of the Voiceover 08 is of a high quality microphone pre-amp for a selection of microphone types. There are three gain positions available allowing simple selection of dynamic mics, condenser mics, or ribbon (lip) mics /high gain. Any mic type can therefore be interfaced with an audio mixer, PC sound card, or other recording device that requires a line level input. Selectable 48v phantom power is also available.
- **Automatic Gain Adjust (AGA) System**  
A key function of the Voiceover 08 is its AGA system. The AGA system was developed by Glensounds Digital Design Team, utilizing the latest DSP technology. As the user speaks into the microphone, a press of the 'Take Level' control starts a 6 second evaluation of the audio gain level required. This allows a non technical user to achieve a perfect input level without worry. The AGA can be re-calibrated at any time, without loss of audio.  
  
A multi-coloured LED indicates the input level in three stages. Green for 'signal present', yellow for 'approaching clipping', and red for 'clipping'.
- **Analogue and Digital Outputs**  
The Voiceover 08 has a comprehensive range of output options to give the user maximum flexibility.
  - Analogue outputs are available unbalanced on a phono connection, and balanced on XLR.
  - Digital outputs are available as S/PDIF on phono, and S/PDIF on fibre optic.
- **Headphone Monitor Mixer**  
The operator can connect headphones to the Voiceover 08 for monitoring via a front panel 6.35mm jack socket.

There is an external, two channel, analogue audio input available either on balanced XLR or un-balanced phono. This input has an adjustable level control on the front panel. This allows the user to monitor the context material that they may be speaking over. This input is only available for monitoring on the headphones and does not appear on the outputs.

The headphone monitor also includes an adjustable level for the incoming mic input (sidetone) allowing the user to monitor themselves.




# Block Diagram

ATOMI C



VOICE OVER

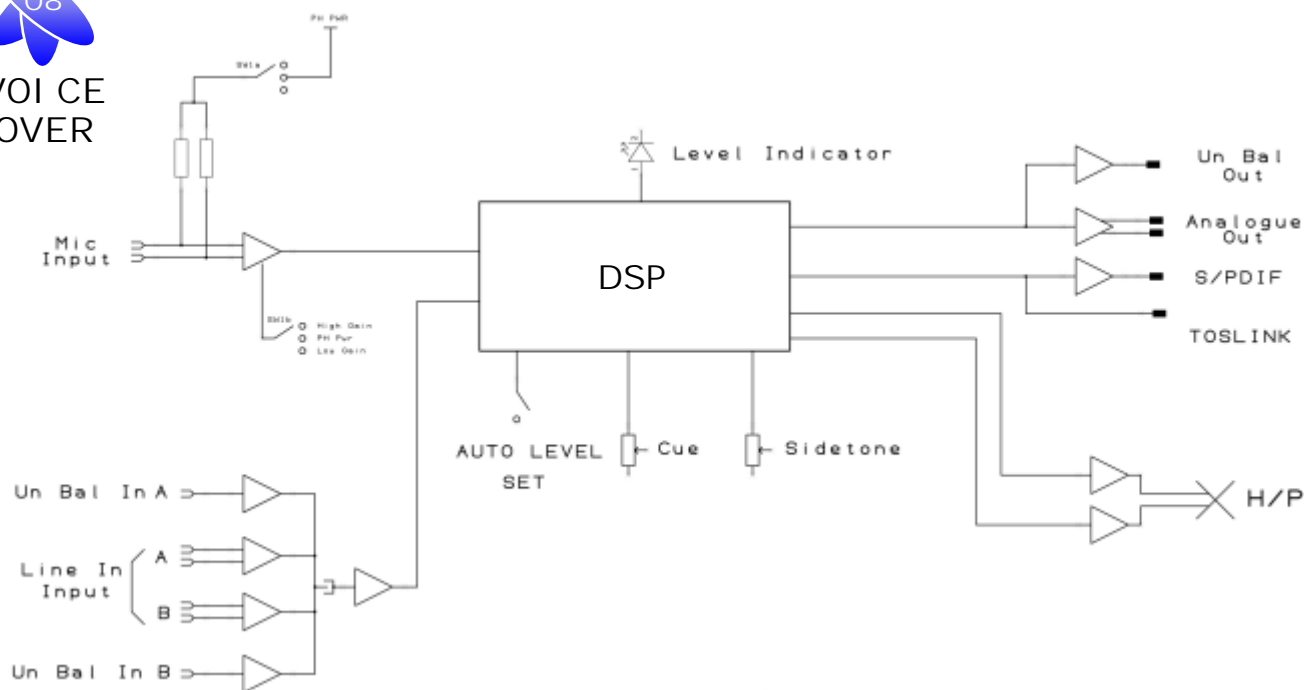

block diagram

## Specifications

### GENERAL SPECIFICATIONS

HEIGHT	1RU
WIDTH	266mm (rack ears available)
DEPTH (ALL Excluding Connectors)	137mm
POWER INPUT	100 to 240 VAC 50 – 60 Hz
COMPLIANCE	CE, WEEE, RoHS & EMC
AUDIO CONNECTORS	High quality Neutrik

### MIC INPUT

INPUT IMPEDANCE	1K $\Omega$
TYPE	Electronically balanced
PHANTOM POWER	48v (selectable)
REAR PANEL GAIN SWITCH	High: 61dB, Low: 54dB, Phantom Power: 46dB

### MIC AGA

TYPE	DSP digital circuit
SAMPLE RATE	48kHz
GAIN RANGE OF AGA	26dB

### COMPRESSOR / LIMITER

TYPE	DSP digital circuit
CIRCUIT	Smooth acting 'silent' to prevent output overload

### LINE INPUT

TYPE	Electronically balanced
LINE UP LEVELS	Balanced: 0dBu, Unbalanced: -6dBu
IMPEDANCE	>50ohms

### OUTPUT

TYPES	Electronically balanced analogue, unbalanced analogue, isolated optical TOSLINK
S/PDIF,	>50k
ANALOGUE IMPEDANCE	Balanced: 0dBu, Unbalanced: -6dBu
LINE UP LEVEL (ANALOGUE)	-18 dBFS (0dBu)
LINE UP LEVEL (DIGITAL)	48kHz (44.1 on request)
DIGITAL SAMPLE RATE	

### HEADPHONES

CONNECTOR	6.35mm jack plug (A/B gauge)
IMPEDANCE	32-2k ohms

## Rear Panel



## GlenSound ATOMIC Range

*The ATOMIC Range features the key elements demanded by the modern broadcaster. Sonic integrity, the finest audio components, ease of use, and GlenSound broadcast grade reliability. If you see the Atomic and GlenSound logo on a product, you have the assurance of a product designed with the best available technology, with the design and development expertise of GlenSound engineers who have been developing broadcast audio products since 1966.*

# Atomic



Your local dealer:

**GlenSound Electronics Ltd.**  
6 Brooks Place, Maidstone, Kent, ME14 1HE. UK  
Tel: +44 (0) 1622 753662 Fax: +44 (0) 1622 762330  
Email: sales@glenSound.co.uk www.glenSound.co.uk