



LODGE

Rack Glensound HD Voice Mobile Phone

The Lodge is a rack mount Mobile Phone Hybrid with 7kHz HD Voice audio. It is used anywhere you need a high quality mobile phone interface - OB vans, Studios etc. This new generation of Glensound phones allows flexibility across new 4G VoLTE networks around the world.



Multiple Networks

A 4G VoLTE mobile phone with features specifically for broadcast. Also features legacy 3G and 2G connectivity



Multiple Power Options

- IEC Mains Socket
- DC input from 10-15V.
- USB C socket to allow USB power banks



Output Compressor

An output compressor prevents any peak in the audio being sent onto the HD Voice network. HD Voice is very sensitive to peaks and the output compressor improves the quality of the audio received at the remote end.



Background Noise Suppressor

HD Voice features a background noise suppressor that greatly removes unwanted background noise.



Superior Reception

The Lodge will ship with T-Bar GSM antenna with 2.5m cable for improved reception and range when on the 4G VoLTE network.




Monitoring & Setup OLED Display

A high resolution OLED screen provides caller ID, signal strength, network, number dialled, metering and other setup information



High Quality Audio

The HD Voice system offers 7kHz mobile calls on compatible mobile networks using 4G VoLTE or 3G UMTS



Auto Answer and Auto Redial

The Lodge can be set to answer incoming calls automatically and to auto redial if a call is lost.




Glensound Referee Input Compressor

Glensound's Referee compressor has been specially designed and updated over many years, specifically to cope with the excessive peaks often



Direct Line Output

A 3 pin XLR provides either a clean output of the incoming caller or a mix of incoming caller and operator.



Phonebook

Quick dial 10 number phonebook



Mic On/Off or Cough Button


A clear pushbutton is used to activate the mic, or can be set as a cough button

LODGE

Rack Glensound HD Voice Mobile Phone

HD Voice Key Points

- Glensound HD Voice - 7kHz Audio Bandwidth**
 Glensound HD Voice is an automatic feature available around the world on compatible mobile networks using 4G LTE or 3G UMTS. Connecting two Glensound HD Voice mobile phone hybrids in the same country, across a compatible 4G VoLTE or 3G UMTS network, will give a clear 7kHz of audio bandwidth.
- HD Voice Is AMR-WB (Adaptive Multi Rate Wide Band)**
 Also known as G.722.2. This is the algorithm more commonly known as HD Voice. It offers significant advantages for broadcasters:
 - Doubles voice bandwidth over 2G GSM to 50-7000Hz (2G narrow band speech codec is 300-4000Hz)
 - 12.65 kbit/s or higher coding bit-rates provide high quality wideband audio
 - Gives a better lower frequency response, down to 50Hz (2G is 300Hz) for more natural sounding voices.
- Glensound HD Voice when on 3G Does Not Require The Data Network**
 With HD Voice, The Lodge connects as a voice call, not a data call.
 - Bandwidth is consistent once connected. With data connections, bandwidth varies during a connection, but on a HD Voice call it does not. Once you are connected your call quality will remain consistent.
 - No extra call charges. As the network sees the connection as a voice call, there are no extra charges and no data usage as part of a data charging package.
 - The Lodge will still operate at 7 kHz HD Voice even in busy locations where there is little available data - HD Voice doesn't need data!
- Configurable To Operate On 2G GSM, 3G UMTS or 4G VoLTE**
 Calls can be locked to 2G, or 3G only with any calls made on HD Voice automatically dropping down to 2G when moving outside a 3G area without disconnecting the call. The Lodge also operates as a standard 2G mobile phone, and with advances in performance and noise reduction capabilities found on the Lodge, improvements in-call quality can still be heard.
- Accommodates A Broader Range Of Audio Frequencies**
 Glensound HD Voice can accommodate a wider range of audio frequencies thus improving the overall call quality. This will aid ultimate clarity in noisy environments with reduced background noise from the background noise suppressor.
- A Cost Effective Upgrade**
 Glensound HD Voice is one of the most cost effective upgrades that can be made to improve audio quality using mobile phones. This makes the Lodge great for use in a Studio or OB Van, used in conjunction with the Nomad you have the perfect mobile hybrid package.

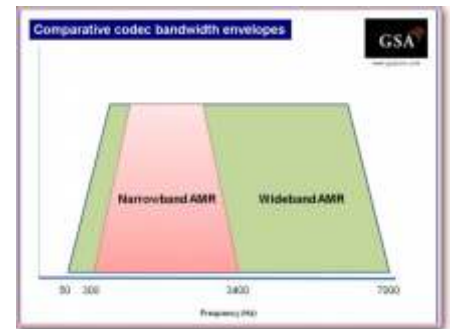

Shown here with 1 additional module installed

LODGE

Rack Glensound HD Voice Mobile Phone

Tour

Front Panel



The illuminated on/off air button can be configured as a cough. The headphone volume and gain control for setting input level are carried out with the same control with the latter requiring a push. The levels are shown on the display. You can also set the input as Mic., Mic.+48V, or line level. The display also shows network and power status.

Rear Panel



There is single 3 pin XLR socket for the input. With a 6.35mm jack socket for headphone connection. 110-240v AC mains, the DC input is on the rear panel requiring an input of 10-15VDC. In addition to this the USB C socket allows for the use of a power bank.

Options




The Lodge can accommodate 2 additional modules these can be retro fitted giving a 3 mobile phone hybrid in a single 1U rack space. We supply a T-Bar aerial as standard but can supply mini aerials if required

Menu

Detailed below are the option screens you can access these with the cog button and control knob

Main Menu




Shows the Connected network, Signal Strength, 2G, 3G or 4G and Current battery/power status

Silent Mode




Silent Mode On/Off
Switches off the external ringer. Still audible through headphones

Recall Number




You can recall the last 10 numbers

Line Out




Line out can be set to: Outbound, Inbound or Mixed all via the rear mounted 3 pin XLR

Save Number



10 Number phonebook

HP Out



Headphone out can be set to: Outbound, Inbound or Mixed, all via the 6.35mm jack

Mic Key Behavior



Latching Muted, Un-muted and Cough

HP End Stop




Headphone Min volume Off-10

Input Mode



Mic, Line, Phantom powered Mic.

ANC



Active Noise Cancellation On/Off

LODGE

Rack Glensound HD Voice Mobile Phone

Specification

NETWORK

Frequency Bands

LTE-FDD:
B1/B2/B3/B4/B5/B6/B7/B8/B12/B13/B18/
B19/B20/B25/B26/B28
LTE-TDD: B28/B39/B40/B41
WCDMA: B1/B2/B4/B5/B6/B8/B19
GSM: B2/B3/B5/B8
Certifications Carrier:
AT&T/ U.S. Cellular (America) *
Deutsche Telekom (Europe)
Telus (Canada)

SPECIFICATIONS

2G AUDIO FREQUENCY RESPONSE

Telephone networks provide 300Hz to 3.4 kHz audio bandwidth

3G/4G HD VOICE FREQUENCY RESPONSE

HD Voice provides 50Hz to 7kHz audio bandwidth

ALGORITHM

HD Voice is AMR-WB (G722.2)

NETWORK COMPATIBILITY

Will operate on most mobile phone network and most SIM cards *

HD VOICE COMPATIBILITY

Will operate on any compatible HD voice networks

INPUTS AND OUTPUTS

Mic Input Connector

Neutrik balanced XLR

Line Out

Neutrik balanced XLR

Headphone Out

6.35mm Jack Socket

Line in Level

0dBu

Dynamic Mic Line up

-46dBu

Phantom Mic Lineup

-46dBu

Line Input Gain Range

+/- 15dB

Mic Input Gain Range Rate

+/- 15dB

Headroom @ Mic Line Up

30dB

Output Level

0dBu

Output Gain control

Fixed

Max Output Level

+18 dBu

POWER

Mains Input

Filtered IEC, 100-240VAC (+/- 10%) 50/60Hz

External DC Input

+10 to +15 VDC, 2.5mm barrel connector

USB

Type C connection

Power On LED

Bright Blue

AERIAL

AERIAL CONNECTOR TYPE

2 x SMA

AERIAL TECHNOLOGY

Diversity

RF OUTPUT POWER

2 Watts

PHYSICAL

Size

19" Wide 1RU high 140mm Deep

Weight

1.35kg (with 3 modules)

ENVIRONMENTAL

Operating Temperature

0 to +50 °C (32 to 122 °F)

Storage Temperature

-20 to +70 °C (-4°C to 158 °F)

Relative Humidity

0 to 95% non-condensing

INCLUDED ITEMS

Handbook

Available by download

Aerial

2 x 2.5M T Bar Antenna

Mains Cable

1 x ISC Mains Cable (UK& Europe Only)

*Please check with Glensound on network compatibility